


## MULTI FUNCTION 600

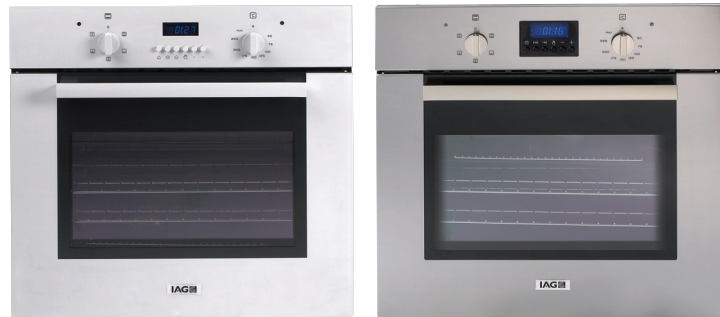

<b>Colour:</b>	White	Stainless Steel
<b>Model:</b>	IOS6WE2	IOS6SE2
<b>Dimensions:</b>	595mm (H) x 595mm (W) x 540mm (D)	
<b>Cut Out Size:</b>	589mm (H) x 560mm (W) x 550mm (D)	
<b>Packaging:</b>	<i>Carton Size</i>	66cm (H) x 66cm (W) x 66cm (D)
	<i>Carton Cubic metres</i>	0.287 cubic metres
	<i>Carton Weight</i>	37.5 kg
<b>Oven Capacity:</b>	57 litres	
<b>Fanned oven (6)</b>	Light off	
<b>Function Selector</b>	Oven light on (stays on for all functions)	
<b>Knob:</b>	<input type="checkbox"/> Bottom heating element on <input type="checkbox"/> Top and bottom heating elements on <input type="checkbox"/> Top and bottom heating elements and fan on <input type="checkbox"/> Bottom heating element and fan on <input type="checkbox"/> Grill heating element and fan on	
<b>Method of Installation:</b>	Wall mounted or under bench	
<b>Total Kilowatts:</b>	2082W	
<b>Maximum Amperage:</b>	9.05 amps	
<b>Electrical Connection:</b>	Hard wired, single phase	

Description	Nominal Data
Lower heating element of the oven	1200W
Top heating element of the oven grill	850W
Grill heating element	1900W
Grill heating element with fan on	1932W
Oven lamp	15W
Top and bottom heating elements on	2050W
Top and bottom heating element and fan on	2082W
Tangential cooling fan	22W
Rear fan	32W
Supply cable	HO5 RR-F 2.5mm <sup>2</sup> cross section

## MULTI FUNCTION 600

- Temperature Selection:** 50° to 250° Celsius
- Ventilation:** Front vented
- Cooling Fan:** Tangential safety cooling fan to reduce the temperature of oven surrounds
- Electronic Programmer:** From 0.01 to 23.59 +hh,mm  
Allows for Automatic, semi-automatic and manual cooking with minute minder and 24 hour clock.
- Tray Configuration:** 2 x rack, 1 x Grill tray, 1 x tray trivet, 1 x tray handle
- Method of Installation:** The oven can be fitted into a tall cabinet or a base module but to reduce the risk of the oven overheating there must be adequate supply of airflow, therefore provision must be made within the cabinetry for effective air circulation.

To make sure the appliance is properly aerated remove the rear panel of the base module or make a hole (A) as shown in figure.

Put the appliance in place and secure with the screws provided.

The oven must be supported by a base that will withstand its full weight. Screws are only used to locate the appliance inside its cabinet housing.

**Warning:** IAG Appliances have been tested and approved to the relevant Australian Standards. However if an oven is built into or close to cabinetry, the cabinetry must be able to withstand temperatures of 75° Celsius. Failure to do so may result in deterioration or discolouring of the cabinetry. This warning is particularly relevant where vinyl coated products are installed. In this instance oven heat deflectors should be used. IAG Appliances cannot accept responsibility for damage caused where the cabinetry fails to meet the above temperature tolerance requirements.

