

# RANGEHOODS

GLASS VISOR  
FIXED  
600




<b>Colour:</b>	White	Stainless Steel
<b>Model:</b>	IRS6WE1	IRS6SE1
<b>Dimensions:</b>	130mm (H) x 599mm (W) x 507mm (D)	
<b>Packaging:</b>	Carton Size:	63 cm (H) x 17 cm (W) x 55 cm (D)
	Carton Cubic metres:	0.058 cubic metres
	Carton Weight:	7.4 kg
<b>Motor:</b>	Single 120 watt	
<b>Airflow:</b>	Airflow = max. 220m <sup>3</sup>	
<b>Noise Level:</b>	Max. 67 dBA	
<b>Controls:</b>	Slide, 3 speed	
<b>Lamps:</b>	2 x 40 W	
<b>Power Requirement:</b>	240V 10 Amps	
<b>Filter:</b>	Aluminium mesh	
<b>Recirculating:</b>	1 x Carbon Filter (Optional - <b>Code IXFC1</b> - available to purchase on 1800 805 300). IMPORTANT: For recirculating operation Rangehood must have internal slide pushed towards the rear of the unit. Slide located on the left hand side of the motor casing. Units supplied for recirculating ex factory.	
<b>Ducting:</b>	Top or Rear (for details refer to the Ducting Specification Sheets under Accessories on the website).	
<b>Duct Spigot:</b>	100 mm	
<b>Minimum Height Above Cooktop:</b>	Gas:	650mm
	Electric:	650mm
<b>Method of Installation:</b>	Under overhead cupboard or fixed to wall	
<b>Country of Origin:</b>	Italy	


## RANGEHOODS

GLASS VISOR  
FIXED  
600


Duct Spigot Size

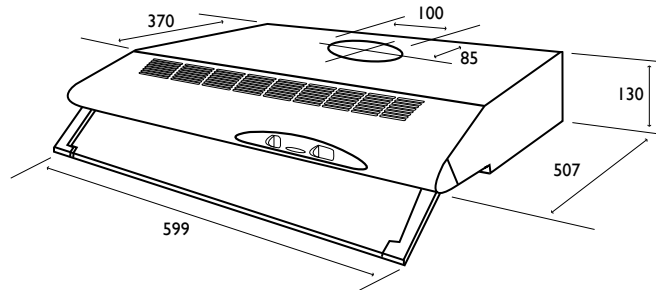


Rear View

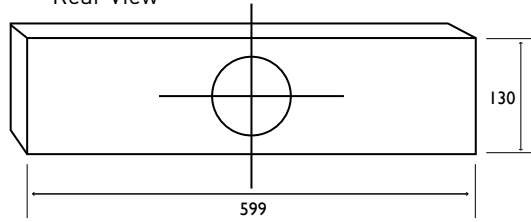


Rear ducted to outside

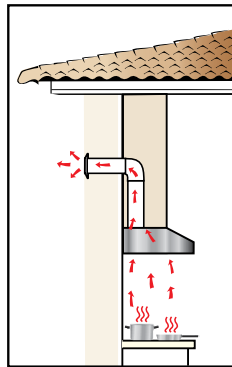

Top ducted to outside

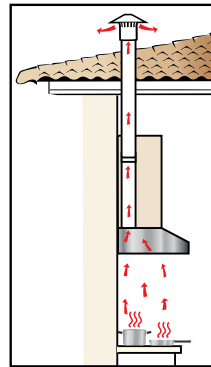

Side ducted to outside

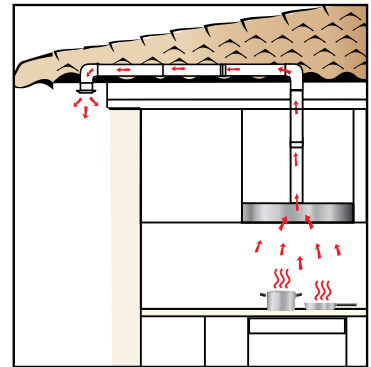

Side ducted through bulkhead

