


ROOF OUTLET DUCTING KIT

for Visor 600
 Slide Out 600 & 900 Rangehoods
 Canopy 600 & 900 Rangehoods

IRD005T and IRD005M kit consists of all itemised components as listed below.

For ducting directly from range hood through ceiling and roof cavity to exterior. Note: In NSW, ACT & Qld it is illegal to duct into the ceiling cavity only and not to the exterior.

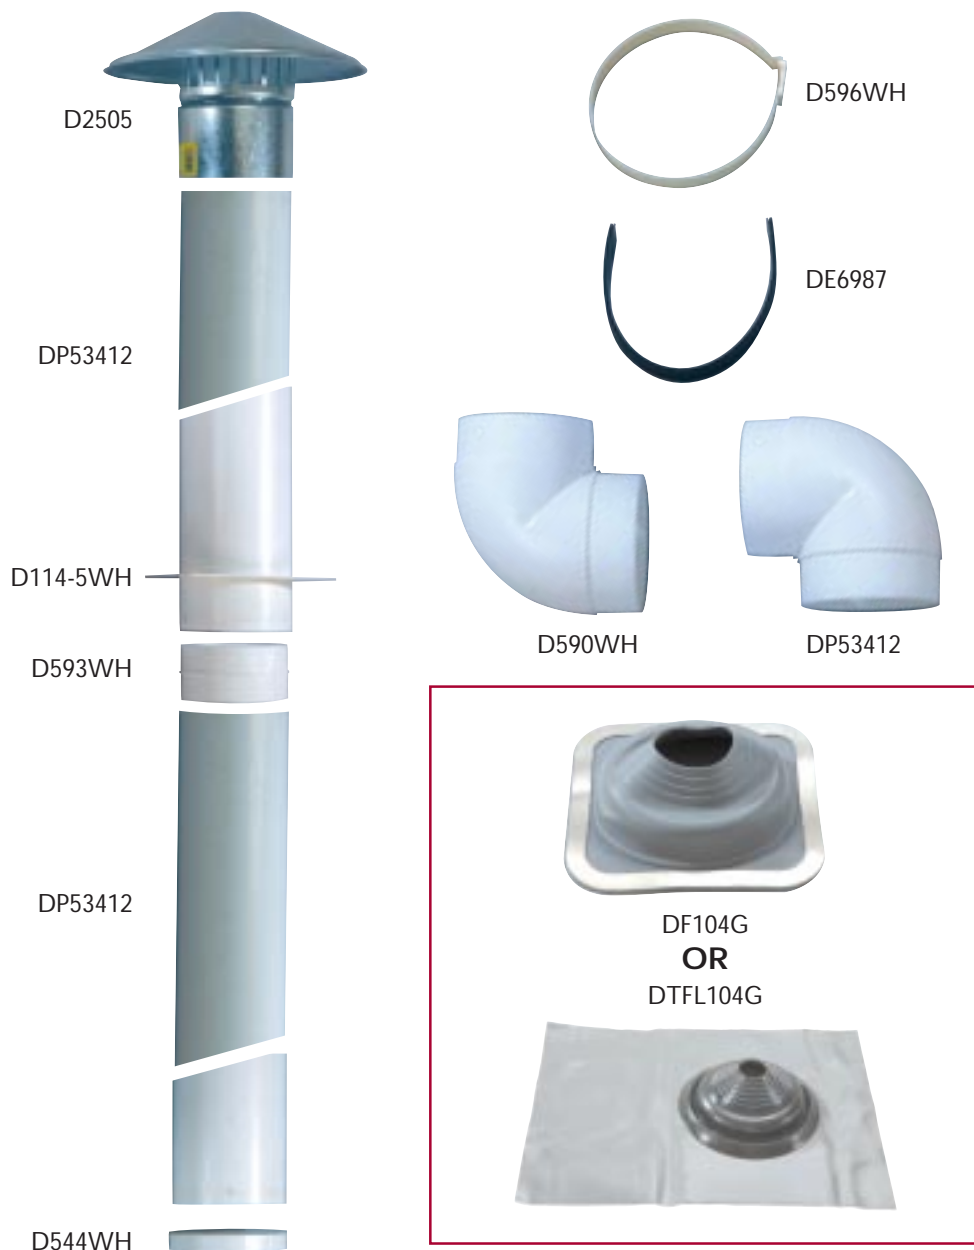

ROOF OUTLET DUCTING KIT

for Visor 600
Slide Out 600 & 900 Rangehoods
Canopy 600 & 900 Rangehoods

IRD005T and IRD005M kit consists of all itemised components as listed below.

For ducting directly from range hood through ceiling and roof cavity to exterior. Note: In NSW, ACT & Qld it is illegal to duct into the ceiling cavity only and not to the exterior.

Model: IRD005T (Tile Flashing)
IRD005M (Dektile Flashing)

Features:

- Manufactured with flame retardant plastics to meet the relevant international standards
- Lightweight, with simple push-fit connections for quick installation
- Ducts are easily cut to length with a hacksaw
- Does not corrode, leading to long life
- Recycled materials are used wherever possible

Standards and Materials: The system parts and channels are made of flame-retarded materials to conform to BS 476, DIN 4102/B1, M1, UL94, V2 and AS1668. The parts are made from Polypropylene CP3457, HI Polystyrene CP3442 and PVC.

Code	Description	Quantity	Dimensions
D2505	China Hat Bowls	1	Ø 125mm
D593WH	Easipipe Connector	1	Ø 125mm
D590WH	Easipipe Elbow Bend	2	Ø 125mm
DP53412	Easipipe	2	● 125mm L1200mm
D596WH	Easipipe Fixing Clip	1	Ø 125mm
DE6987	Rubber Gasket	1	500mm
D544WH	Adaptor	1	Ø 125mm L100mm
D114-5WH	Round Wall Plate	1	170 x 170 x Ø 125mm
PLUS			
DNFL104G	Tile Flashing	1	● 75mm --- ● 160mm
OR			
DF104G	Dektile Flashing	1	● 75mm --- ● 160mm

Key:

L Length
 Ø Outer Dimensions
 ● Inner Dimensions
 --- Adjustable to – from